

Drum pump motors


N-280

230 Volt, 50/60 Hz, 825 Watt, IP 24

Double insulation protection class II, over load protection switch with integrated low voltage release. 5 m cable with plug. Speed control as option.




PERFORMANCE CURVE N-280

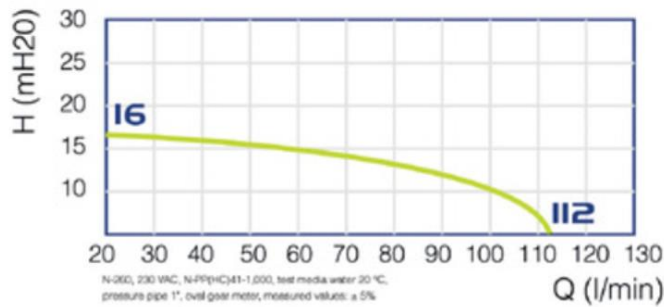

OPERATING DATA

Flow rate	up to 112 l/min
Head	up to 16 m
Viscosity	up to 1,000 mPas
Density	up to 1,9

N-280	Version	Voltage	Code
	with LVR	230 V 1~,50/60 Hz, 825 W	1280 2301
	with LVR + SC	230 V 1~,50/60 Hz, 825 W	1280 2303

LVR: Low voltage release SC: Speed control