

Drum pump motors


N-180

230 Volt, 50/60 Hz, 640 Watt, IP 24

Double insulation protection class II, over load protection switch with integrated low voltage release. 5 m cable with plug. Speed control as option.



PERFORMANCE CURVE N-180

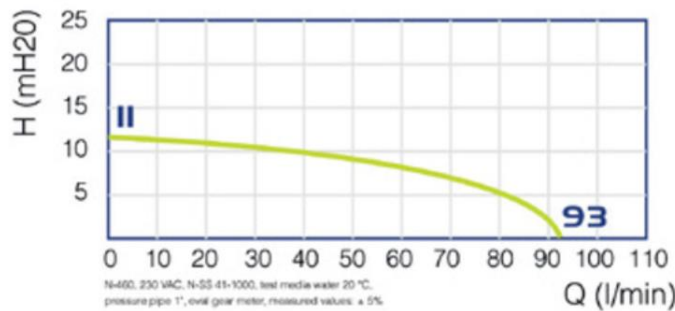

OPERATING DATA

Flow rate	up to 93 l/min
Head	up to 11 m
Viscosity	up to 600 mPas
Density	up to 1,5

N-180	Version	Voltage	Code
	with LVR	230 V 1~,50/60 Hz, 640 W	1180 2301
	with LVR + SC	230 V 1~,50/60 Hz, 640 W	1180 2303

LVR: Low voltage release SC: Speed control